



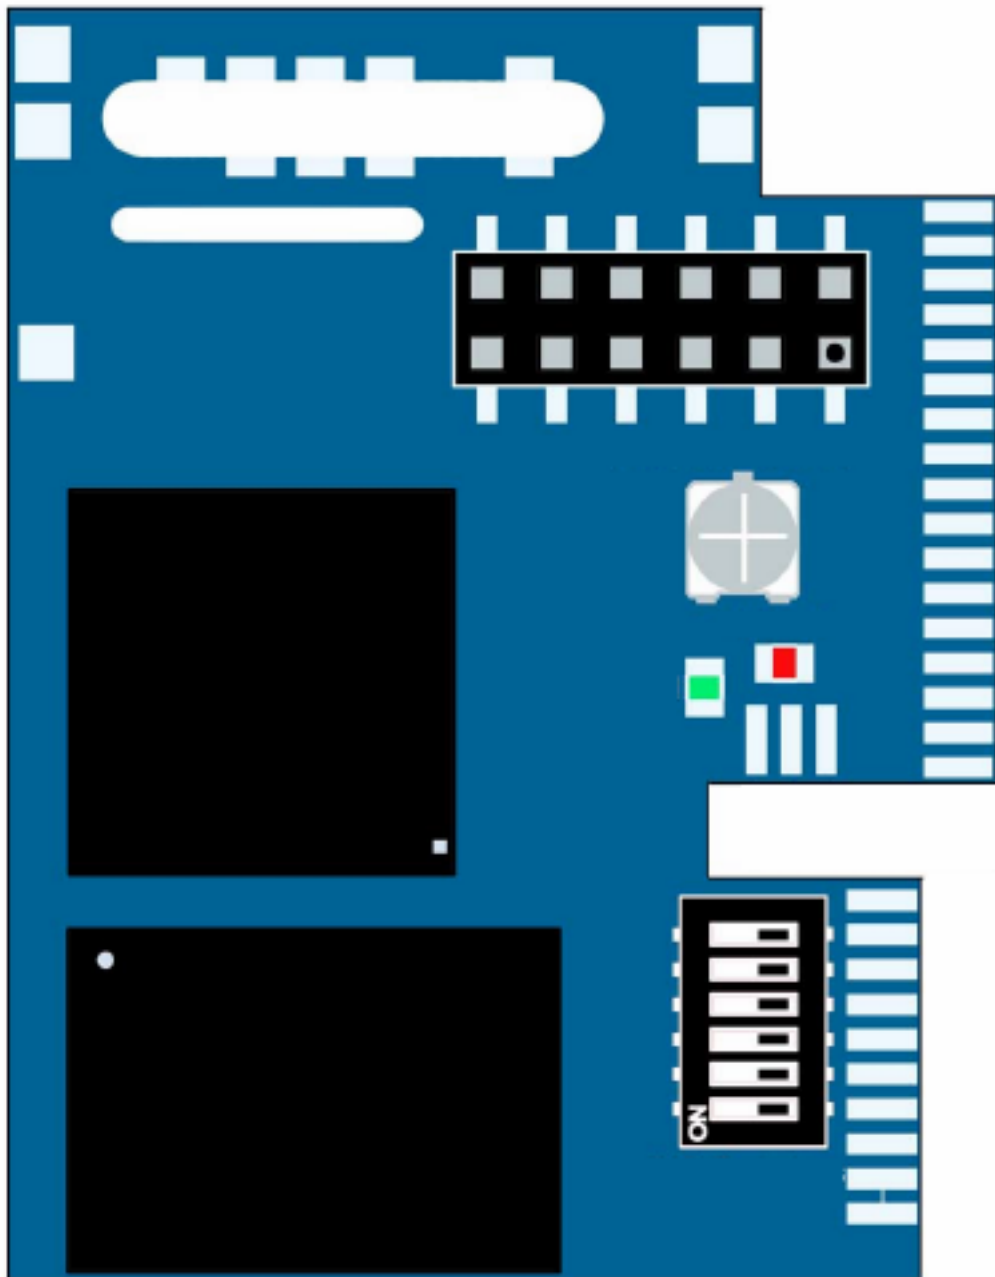

Stecker /
Connector Beschreibung / Description

-	
-	
-	
-	
-	
13	DB6
14	DB7
11	DB4
12	DB5
5	R/W
6	E
3	Kontrast (Poti) / Contrast
4	RS
1	Ground
2 + 15	5V VDD + Hintergrundbeleuchtung Anode / Backlight Anode
16	PWM : Hintergrundbeleuchtung Kathode / Backlight Cathode
-	

2 4 6 8 10 12 14 16 18 20

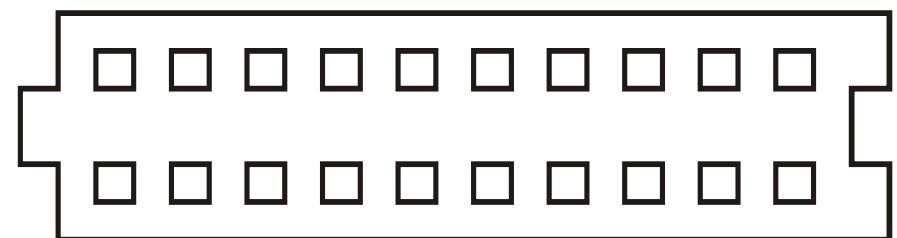

1 3 5 7 9 11 13 15 17 19

(Von hinten / Kabelseite)

Beschreibung / Description Stecker /
Connector

PWM : Hintergrundbeleuchtung Kathode / Backlight Cathode 16

DB7 14
DB6 13
DB5 12
DB4 11


E 6
Ground + R/W 1 + 5

RS 4

Kontrast (Poti) / Contrast 3

5V VDD + Hintergrundbeleuchtung Anode / Backlight Anode 2 + 15

Hier Poti einlöten : ->
Ca. 4.7k – 10k ->

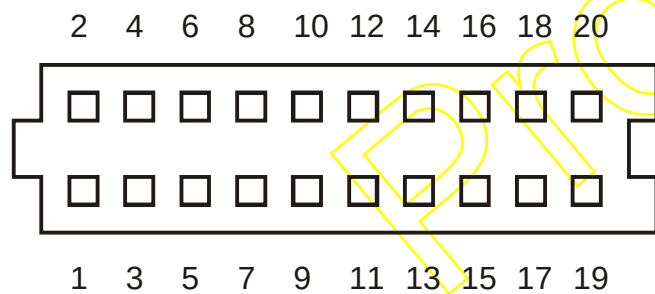

(Von hinten / Kabelseite)

